

KAY PARK REC. CORP.
1301 Pine Street
P.O. Box 477
Janesville, IA 50647-0477

DRINKING FOUNTAIN SPECIFICATIONS

MODEL: KP548H

TYPE: Handicap accessible, meeting current ADA requirements

PEDESTAL: 10-3/4" diameter steel pipe with 3/16" wall.

ARM: 3/16" sheet steel arm projecting 20" from the pedestal.

RECEPTOR: 18 gauge stainless steel with chrome-plated brass drain plug.

BIBB/BS: Chrome-plated brass, located to receptor with vandal-resistant steel guard.

VALVE: Chrome-plated brass push button assembly recessed in 1/2" steel plate with adjustable flow regulating valve.

MOUNTING: Surface. 1/2" thick 15-1/4" o.d. base support plate with four (#4) bolt holes.

WASTE: 1-1/4" schedule 40 PVC.

SUPPLY: 1/2" reinforced vinyl tubing with 1/2" IPS hook-up and stainless steel fittings.

FINISH: Polyester powder coat.

COLOR: Woodland Green. Optional colors: red, blue, dark bronze, black, silver, sand, yellow, orange, and white.

OPTIONS:


- 31 1/2" self-closing hose bibb (n/a with FP fountains)
- 32 1/2" compression type hose bibb with standard hose connection and vacuum breaker (n/a with FP fountains)
- 32-VP same as above, with key-operated shutoff (n/a with FP fountains)
- 34 Frost-proof jug filler (n/a with standard fountains)
- 36 push button jug filler (n/a with FP fountains)
- 37 frost guard (n/a with FP fountains)
- 76 matching chiller unit (n/a with FP fountains)
- 85 valve box
- 90 attached pet fountain (n/a with FP fountains)
- 94 FP attached pet fountain, for FP fountains
- FP frost-proof valve system (must use frost-proof accessories)
- FPS Sanifrost valve system (must use Sanifrost accessories)
- SS stainless steel finish

WILLIAMS DIMENSIONAL INFORMATION

MODEL 5600

All-Purpose Drinking Fountain—Steel pipe
Mounting: Eufrese

**All-Purpose Drinking Fountain—Steel pipe
Mounting; In Ground Bury**

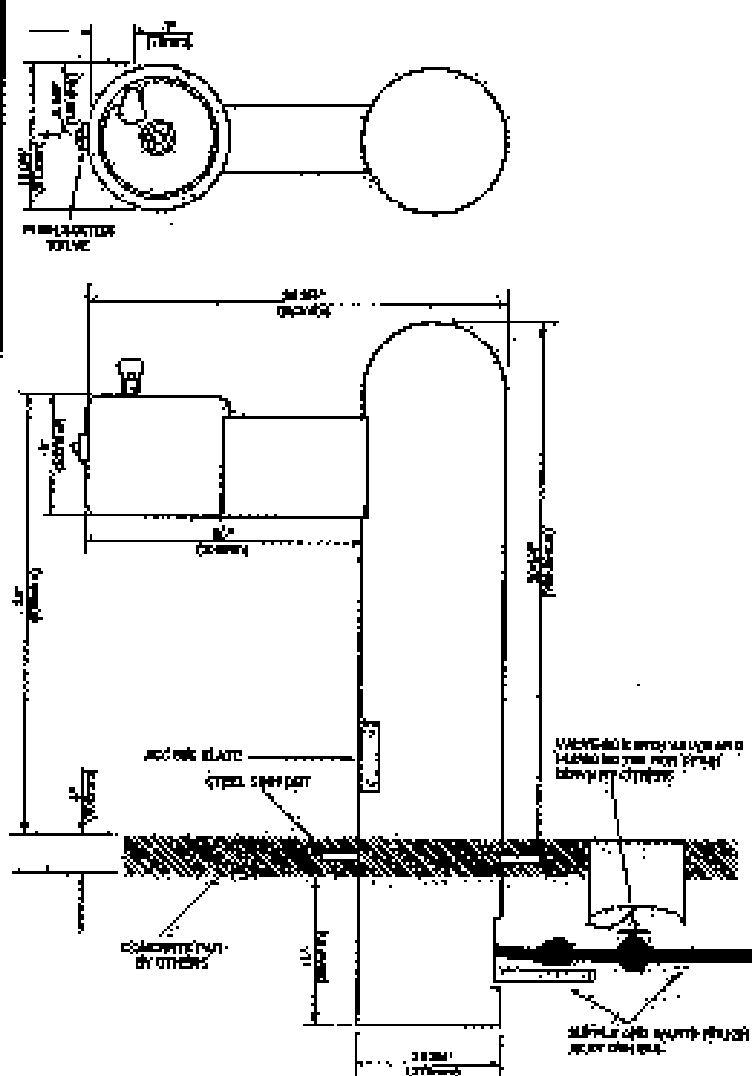

Notes: All dimensions subject to manufacturing variances of plus or minus 1/4" (6.35mm).